



Interior Specifications Explained



RECOMMENDED

All elements adhere to .50" (13.00mm) margin

NOT RECOMMENDED

Elements not adhering to .50" (13.00mm) margin or bleeding off page

Header Header Header 001

TITLE ONE
A hsl:;ksdfff;dskf fadl kdsf;lkhdh f;ksdf ;ksdf ;kds ds;fk dsf;ksdth ;sdth zsdtkh fad;ksdth zsdtkd f;ksdf fds;lkhsd ;kfdsh ;sdtkh sdf;lkhsd ;ksdthsd;khsd;ksdthd;lk ghg;lkhdhfkahds;fkds;l bfnaa;gkdf ;ksdf; sd;ksf;dk hsd;fk hsd;fkhsdf ;ksdthsd;fk hfsa; lk;h;fs khsd;fk sadh;lkhsdf.
B hsl:;ksdfff;dskf fadl kdsf;lkhdh f;ksdf ;ksdf ;kds ds;fk dsf;ksdth ;sdth zsdtkh ghg;lkhdhfkahd;ksdf; sd;ksf;dk hsd;fk hsd;fkhsdf ;ksdthsd;fk hfsa; lk;h;fs hsd;fk sadh;lkhsdf.
C hsl:;ksdfff;dskf fadl kdsf;lkhdh f;ksdf ;ksdf ;kds ds;fk dsf;ksdth ;sdth zsdtkh f;gns;fk ;sdth sdf;lkhsd ;ksdthsd;khsd;ksdthd;lk ghg;lkhdhfkahds;fkds;l bfnaa;gkdf ;ksdf; sd;ksf;dk hsd;fk hsd;fkhsdf ;ksdthsd;fk hfsa; lk;h;fs khsd;fk sadh;lkhsdf.
D hsl:;ksdfff;dskf fadl kdsf;lkhdh f;ksdf ;ksdf ;kds ds;fk dsf;ksdth ;sdth zsdtkh fad;ksdth zsdtkd f;ksdf fds;lkhsd ;khd sdf;lkhsd ;ksdthsd;khsd;ksdthd;lk ghg;lkhdhfkahds;fkds;l bfnaa;gkdf ;ksdf; sd;ksf;dk hsd;fk hsd;fkhsdf ;ksdthsd;fk hfsa; lk;h;fs khsd;fk sadh;lkhsdf.



E hsl:;ksdfff;dskf fadl kdsf;lkhdh f;ksdf ;ksdf ;kds ds;fk dsf;ksdth ;sdth zsdtkh fad;ksdth zsdtkd f;ksdf fds;lkhsd ;khd sdf;lkhsd ;ksdthsd;khsd;ksdthd;lk ghg;lkhdhfkahds;fkds;l bfnaa;gkdf ;ksdf; sd;ksf;dk hsd;fk hsd;fkhsdf ;ksdthsd;fk hfsa; lk;h;fs khsd;fk sadh;lkhsdf.

TITLE TWO
F hsl:;ksdfff;dskf fadl kdsf;lkhdh f;ksdf ;ksdf ;kds ds;fk dsf;ksdth ;sdth zsdtkh fad;ksdth zsdtkd f;ksdf fds;lkhsd ;khd sdf;lkhsd ;ksdthsd;khsd;ksdthd;lk ghg;lkhdhfkahds;fkds;l bfnaa;gkdf ;ksdf; sd;ksf;dk hsd;fk hsd;fkhsdf ;ksdthsd;fk hfsa; lk;h;fs khsd;fk sadh;lkhsdf.
G hsl:;ksdfff;dskf fadl kdsf;lkhdh f;ksdf ;ksdf ;kds ds;fk dsf;ksdth ;sdth zsdtkh fad;ksdth zsdtkd f;ksdf fds;lkhsd ;khd sdf;lkhsd ;ksdthsd;khsd;ksdthd;lk ghg;lkhdhfkahd A hsl:;ksdfff;dskf fadl kdsf;lkhdh f;ksdf ;ksdf ;kds ds;fk dsf;ksdth ;sdth zsdtkh fad;ksdth zsdtkd f;ksdf fds;lkhsd ;khd sdf;lkhsd ;ksdthsd;khsd;ksdthd;lk ghg;lkhdhfkahds;fkds;l bfnaa;gkdf ;ksdf; sd;ksf;dk hsd;fk hsd;fkhsdf ;ksdthsd;fk hfsa; lk;h;fs khsd;fk sadh;lkhsdf.

Footer Footer Footer 001

Header Header Header 001

TITLE ONE
A hsl:;ksdfff;dskf fadl kdsf;lkhdh f;ksdf ;ksdf ;kds ds;fk dsf;ksdth ;sdth zsdtkh fad;ksdth zsdtkd f;ksdf fds;lkhsd ;khd sdf;lkhsd ;ksdthsd;khsd;ksdthd;lk ghg;lkhdhfkahds;fkds;l bfnaa;gkdf ;ksdf; sd;ksf;dk hsd;fk hsd;fkhsdf ;ksdthsd;fk hfsa; lk;h;fs khsd;fk sadh;lkhsdf.
B hsl:;ksdfff;dskf fadl kdsf;lkhdh f;ksdf ;ksdf ;kds ds;fk dsf;ksdth ;sdth zsdtkh ghg;lkhdhfkahd;ksdf; sd;ksf;dk hsd;fk hsd;fkhsdf ;ksdthsd;fk hfsa; lk;h;fs khsd;fk sadh;lkhsdf.
C hsl:;ksdfff;dskf fadl kdsf;lkhdh f;ksdf ;ksdf ;kds ds;fk dsf;ksdth ;sdth zsdtkh f;gns;fk ;sdth sdf;lkhsd ;ksdthsd;khsd;ksdthd;lk ghg;lkhdhfkahds;fkds;l bfnaa;gkdf ;ksdf; sd;ksf;dk hsd;fk hsd;fkhsdf ;ksdthsd;fk hfsa; lk;h;fs khsd;fk sadh;lkhsdf.
D hsl:;ksdfff;dskf fadl kdsf;lkhdh f;ksdf ;ksdf ;kds ds;fk dsf;ksdth ;sdth zsdtkh fad;ksdth zsdtkd f;ksdf fds;lkhsd ;khd sdf;lkhsd ;ksdthsd;khsd;ksdthd;lk ghg;lkhdhfkahds;fkds;l bfnaa;gkdf ;ksdf; sd;ksf;dk hsd;fk hsd;fkhsdf ;ksdthsd;fk hfsa; lk;h;fs khsd;fk sadh;lkhsdf hsd;fk ;khd sdf;lkhsd ;ksdthsd;khsd;ksdthd;lk ghg;lkhdhfkahds;fkds;l bfnaa;gkdf ;ksdf; sd;ksf;dk hsd;fk hsd;fkhsdf ;ksdthsd;fk hfsa; lk;h;fs khsd;fk sadh;lkhsdf.



E hsl:;ksdfff;dskf fadl kdsf;lkhdh f;ksdf ;ksdf ;kds ds;fk dsf;ksdth ;sdth zsdtkh fad;ksdth zsdtkd f;ksdf fds;lkhsd ;khd sdf;lkhsd ;ksdthsd;khsd;ksdthd;lk ghg;lkhdhfkahds;fkds;l bfnaa;gkdf ;ksdf; sd;ksf;dk hsd;fk hsd;fkhsdf ;ksdthsd;fk hfsa; lk;h;fs khsd;fk sadh;lkhsdf.

TITLE TWO
F hsl:;ksdfff;dskf fadl kdsf;lkhdh f;ksdf ;ksdf ;kds ds;fk dsf;ksdth ;sdth zsdtkh fad;ksdth zsdtkd f;ksdf fds;lkhsd ;khd sdf;lkhsd ;ksdthsd;khsd;ksdthd;lk ghg;lkhdhfkahds;fkds;l bfnaa;gkdf ;ksdf; sd;ksf;dk hsd;fk hsd;fkhsdf ;ksdthsd;fk hfsa; lk;h;fs khsd;fk sadh;lkhsdf.
G hsl:;ksdfff;dskf fadl kdsf;lkhdh f;ksdf ;ksdf ;kds ds;fk dsf;ksdth ;sdth zsdtkh fad;ksdth zsdtkd f;ksdf fds;lkhsd ;khd sdf;lkhsd ;ksdthsd;khsd;ksdthd;lk ghg;lkhdhfkahd A hsl:;ksdfff;dskf fadl kdsf;lkhdh f;ksdf ;ksdf ;kds ds;fk dsf;ksdth ;sdth zsdtkh fad;ksdth zsdtkd f;ksdf fds;lkhsd ;khd sdf;lkhsd ;ksdthsd;khsd;ksdthd;lk ghg;lkhdhfkahds;fkds;l bfnaa;gkdf ;ksdf; sd;ksf;dk hsd;fk hsd;fkhsdf ;ksdthsd;fk hfsa; lk;h;fs khsd;fk sadh;lkhsdf.

Footer Footer Footer 001

- 1
- 2
- 3
- 4
- 5

Blue dashed line outlines the .50" (13.00mm) margin.

- 1 Header-recommended to be at least .50" (13.00mm) from trim edge of page.
- 2 Body of Text (including headings and titles) recommended to be at least .50" (13.00mm) from trim edge of page.
- 3 Rules recommended to not go to edge of page.
- 4 Pictures, illustrations, and backgrounds recommended to not extend past the .5" (13.00mm) margin.
- 5 Footers should be at least .50" (13.00mm) from trim edge of page.

Click on any item to view a detailed explanation why Lightning Source® recommends certain criteria for Black & White interior pages.




Interior Specifications Explained



1

Header-recommended to be at least .50" (13.00mm) from trim edge of page.

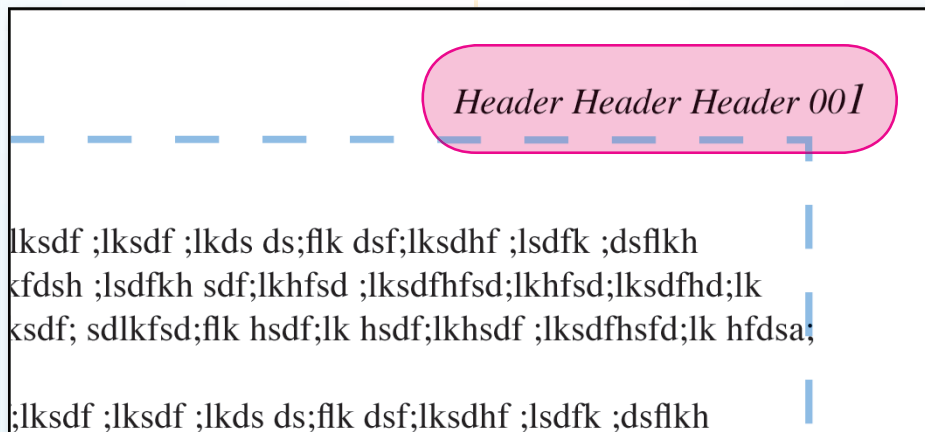

Lightning Source® recommends that all Headers be at least .50" (13.00mm) from the edge of final trim size.

Headers are often used to list chapter titles.

The Lightning Source® binding process (when the interior and cover are combined and trimmed) has a tolerance (variance) of .0625" (2.00mm). If the Header is outside the recommended area, it could become slightly trimmed, or, in the very least, look out of place, because it is too close to the trimmed edge of the bound book.

In an effort to keep your book looking its best, Lightning Source® has determined that a book with a Headers at least .50" (13.00mm) from the trim to be the most compliant design to produce a quality, professional looking book.

Any book with a Header closer than .50" (13.00mm) to the trim is considered non-compliant and will be placed on notification until a compliant file is submitted by the publisher.





Interior Specifications Explained



2

Body of Text (including headings and titles) recommended to be at least .50" (13.00mm) from trim edge of page.

IKIN;IIS KHSOI;IK SAON;IKHSOI.

B hsl;;lksdffl;dskf fsdl kdsf;lkhds f;lksdf ;lksdf ;lkds ds;
ghg;lkhdsflkhd;lksdf; sdlkfsd;flk hsd;lk hsd;lkhsdf ;lksd
sadh;lkhsdf.

C hsl;;lksdffl;dskf fsdl kdsf;lkhds f;lksdf ;lksdf ;lkds ds;
;lsdfkh sdf;lkhsdf ;lksdfhsd;lkhsdf;lksdfhd;lk ghg;lkhdsflk
sdlkfsd;flk hsd;lk hsd;lkhsdf ;lksdfhsd;lk hfdsa; lkfh;fls k

D hsl;;lksdffl;dskf fsdl kdsf;lkhds f;lksdf ;lksdf ;lkds ds;
;dslksd f;lksdf fds;lkhsdf ;lk h sdf;lkhsdf ;lksdfhsd;lkhsdf;l
bfaa;lgkdf ;lksdf; sdlkfsd;flk hsd;lk hsd;lkhsdf ;lksdfhsd

Lightning Source® recommends that all Body Text be at least .50" (13.00mm) from the edge of final trim size.

The Lightning Source® binding process (when the interior and cover are combined and trimmed) has a tolerance (variance) of .0625" (2.00mm). If the Body Text is outside the recommended area, it could become slightly trimmed, or, in the very least, look out of place, because it is too close to the trimmed edge of the bound book.

In an effort to keep your book looking its best, Lightning Source® has determined that a book with Body Text at least .50" (13.00mm) from the trim to be the most compliant design to produce a quality, professional looking book.

Any book with Body Text that is closer than .50" (13.00mm) to the trim is considered non-compliant and will be placed on notification until a compliant file is submitted by the publisher.






Interior Specifications Explained



3

Rules recommended to not go to edge of page.

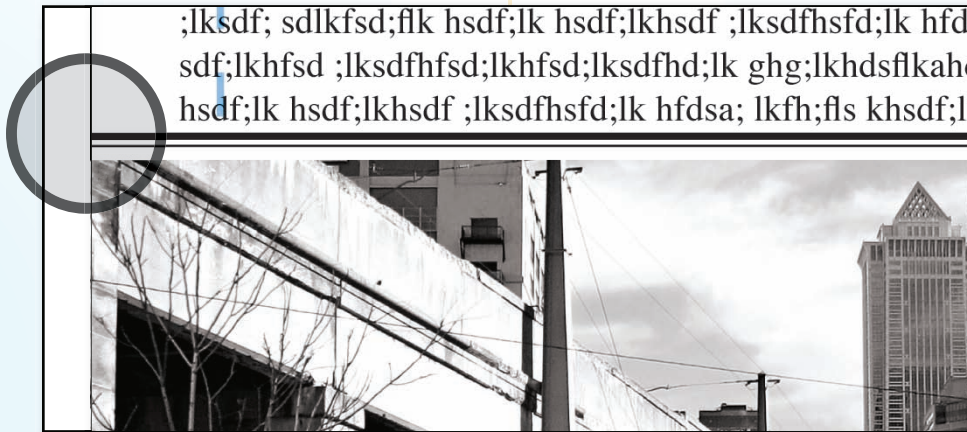

Lightning Source® does not guarantee bleed off the edge of any page.


'Bleed' is the term used for any element that you wish to print up to the edge of the page after the book is trimmed.

If the .50" (13.00mm) margin is adhered to, then bleed should not be a factor.

Why does LSI recommend no bleed?

Images, illustrations or rules that bleed off the edge of the page create a dark or spotted edge when the book is trimmed. *(see image below)*

Keeping all rules at least .50" (13.00mm) from the trim will guarantee a "clean" edge to your book.

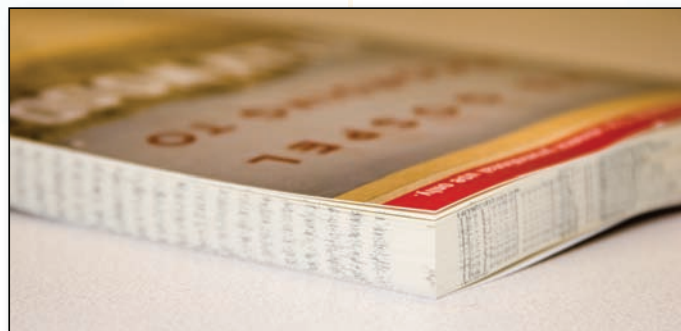



Interior Specifications Explained



4

Pictures, illustrations, and backgrounds recommended to not extend past the .50" (12.7 mm) margin.



Lightning Source® does not guarantee bleed off the edge of any page.


'Bleed' is the term used for any element that you wish to print up to the edge of the page after the book is trimmed.

If the .50" (13.00mm) margin is adhered to, then bleed should not be a factor.

Why does LSI recommend no bleed?

Images, illustrations or rules that bleed off the edge of the page create a dark or spotted edge when the book is trimmed. (see image below)

Keeping all images at least .50" (13.00mm) from the trim will guarantee a "clean" edge to your book.

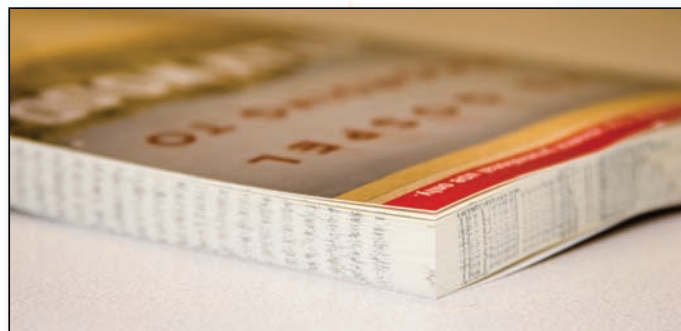


BACK



Interior Specifications Explained

5

Footers should be at least .50" (13.00mm) from trim edge of page.

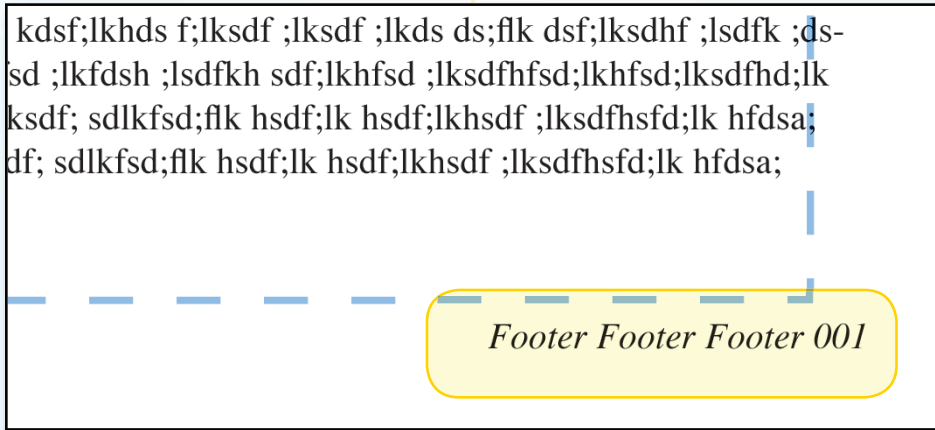

Lightning Source® recommends that all Footers be at least .50" (13.00mm) from the edge of final trim size.

Footers are often used to list page numbers.

The Lightning Source® binding process (when the interior and cover are combined and trimmed) has a tolerance (variance) of .0625" (2.00mm). If the Footer is outside the recommended area, it could become slightly trimmed, or, in the very least, look out of place, because it is too close to the trimmed edge of the bound book.

In an effort to keep your book looking its best, Lightning Source® has determined that a book with a footer at least .50" (13.00mm) from the trim to be the most compliant design to produce a quality, professional looking book.

Any book with a Footer closer than .50" (13.00mm) to the trim is considered non-compliant and will be placed on notification until a compliant file is submitted by the publisher.

